

Reaction to fire test report

Test standard: Ad-hoc test based off ISO 13785-1:2002

Test sponsor: Cladding Safety Victoria (CSV)

System: A cassetted aluminium composite panel wall system

Job number: RTF230139

Test date: 16 February 2023 Revision: R5.0



Quality management

| Revision | Date | Information about the report | | | |
|----------|---------|------------------------------|---------------|-------------|---------------|
| R5.0 | 6 March | Description | Initial issue | | |
| | 2024 | | Prepared by | Reviewed by | Authorised by |
| | | Name | | | |
| | | Signature | | | |
| | | | | | |
| | | | | | |

Contents

| 1. | Introduction | | | |
|-------------------|--|---------------------------|----|--|
| 2. | Test spec | simen | 4 | |
| 2.1 | Schedule of | components | 4 | |
| 3. | Test proc | edure | 7 | |
| 4. | Test measurements and results | | | |
| 5. | Application of test results | | | |
| 5.1 5.2 5.3 | .2 Variations from the tested specimen | | | |
| Арре | endix A | Drawings of test assembly | 15 | |
| Арре | endix B | Photographs | 18 | |
| Арре | endix C | Chemical analysis results | 25 | |

Test standard: General accordance with ISO 13785-1:2002 Job number: RTF230139 Test sponsor: Cladding Safety Victoria (CSV)

Revision: R5.0 Page 3 of 30



1. Introduction

This report documents the findings of the first of three ad-hoc reaction to fire tests on a cassetted aluminium composite panel (ACP) external wall system - performed on 16 February 2024. The test was based on ISO 13785-1:2002.

Warringtonfire performed the test at the request of the test sponsor listed in Table 1.

Table 1 Test sponsor details

| Test sponsor | Address |
|--------------------------|--------------------|
| Cladding Safety Victoria | 717 Bourke Street |
| | Docklands VIC 3808 |
| | Australia |

2. Test specimen

2.1 Schedule of components

Table 2 describes the test specimen and lists the schedule of components. These were provided by the representatives of the test sponsor and surveyed by Warringtonfire. All measurements were done by Warringtonfire – unless indicated otherwise.

Detailed drawings of the test specimen are provided in Appendix A.

Table 2 Schedule of components

| Table 2 Schedule of components | | | |
|--------------------------------|--------------------------------------|---|--|
| Item | Description | | |
| Claddir | Cladding | | |
| 1. | Item name | ACP panelling - cassetted | |
| | Product | Vitrabond FR* Aluminium Composite Panel - 4 mm Dark Oak/Matte White with 0.5 mm skin. | |
| | | *Sample sheets were taken from older manufactured quarantined stock with a higher polyethylene content that is no longer in circulation which was received marked as 'Testing Only'. | |
| | Manufacturer/supplier | | |
| | Material | The material was nominated as panels consisting of two layers of aluminium sheets sandwiching a layer (core) with 45 % polyethylene (PE) and inorganic filler. | |
| | | Analysis conducted by the analytical centre of UNSW showed that the core consisted of polyethylene-vinyl acetate (PEVA) - found to be 43.9 % w/w - whilst the remainder of the material was found to be 45.3 % magnesium hydroxide, 6.1 % calcium carbonate and 4.8 % other inert material. | |
| | | Refer to Appendix C for more detailed results - Sample 23197-1, Oak. | |
| | Size | As shown in Figure 10. | |
| | | Total thickness – 4.1 mm | |
| | | Skin thickness (both sides) – 0.5 mm | |
| | | Cassette depth – 150 mm | |
| | Batch number | 1609418 | |
| | Measured mass/unit area densities | Panel areal density – 6.9 kg/m ² | |
| 2. | Item name | FR Plasterboard | |
| | Product | 13 mm Fyrchek | |
| | Manufacturer/supplier | | |
| | Size | Measured board: 3000 mm × 1200 mm × 13 mm | |

Job number: RTF230139



| Item | Description | | | | |
|--------|-----------------------|--|--|--|--|
| | Batch date 27/07/23 | | | | |
| | Areal density | 11 kg/m² | | | |
| | (measured) | | | | |
| 3. | Item name | Backpan | | | |
| | Product | 0.9 mm thick Galvabond steel | | | |
| | Supplier | | | | |
| | Size | Measured: 1160 mm wide × 3700 mm tall, 0.9 mm thick – in segments | | | |
| Framir | ng | | | | |
| 4. | Item name | Test rig frame - 90 × 90 SHS and 200 × 90 PFC frame | | | |
| | Size | 90 mm \times 90 mm \times 5 mm thick and 200 mm \times 90 mm \times 10 mm thick – refer to Figure 9. | | | |
| 5. | Item name | Aluminium curtain wall transom/mullions (rectangular hollow sections) - framing | | | |
| | Size | 65 mm wide × 120 mm deep × 3 mm thick Total frame size: 120 mm deep × 1165 mm wide × 3705 mm tall | | | |
| | Manufacturer/supplier | Capral Aluminium | | | |
| 6. | Item name | Aluminium angles - framing | | | |
| | Size | 20 mm wide × 30 mm deep × 3 mm thick | | | |
| | Manufacturer/supplier | Rapid Aluminium | | | |
| 7. | Item name | Aluminium stiffener - framing | | | |
| | Size | 3 mm thick | | | |
| | Manufacturer/supplier | Rapid Aluminium | | | |
| 8. | Item name | Internal side frame - steel | | | |
| | Size | Studs and noggings: 90 mm deep × 36 mm wide × 0.55 BMT | | | |
| | Installation | The steel framing members were riveted (item 17) to one another. | | | |
| 9. | Item name | Strap – 50 mm wide | | | |
| | Size | Studs and noggings: 90 mm deep × 36 mm wide | | | |
| | Installation | The steel framing members were riveted (item 17) to one another. | | | |
| Smoke | e seal | | | | |
| 10. | Item name | Smoke seal | | | |
| | Size | 1 mm thick galvanised steel | | | |
| | Manufacturer/supplier | Atlas Steel | | | |
| Insula | Insulation | | | | |
| 11. | Item name | 90 mm thick polyethylene terephthalate (PET) insulation | | | |
| | Density | 10 kg/m ³ | | | |
| | Manufacturer/supplier | Pricewise Insulation | | | |
| 12. | Item name | 50 mm thick aluminium - with fibre-glass mesh - foil faced rockwool insulation | | | |
| | Density of core | 40 kg/m ³ | | | |
| | Manufacturer/supplier | Rockwool Insulation Australia | | | |
| Sealar | nt/Adhesive | | | | |
| 13. | Item name | Weathering sealant | | | |
| | | | | | |

Test standard: General accordance with ISO 13785-1:2002

Job number: RTF230139



| Item | Descri | Description | | |
|---|----------|--|---|--|
| | Produc | t type | Silicone sealant | |
| Product name | | t name | PROSIL 41Im | |
| | Manufa | acturer/supplier | Admil Adhesives | |
| | Usage | | Placed at ACP edges and over screw and rivet locations. | |
| Fixing | s | | | |
| 14. | Item na | ame | Wafer head screws – zinc coated steel | |
| | Size | | 10g × 16 mm long | |
| | Installa | ition | Used to fix aluminium angles (item 6) to the aluminium frame (item 5) at 500 mm centres | |
| 15. | Item na | ame | Wafer head screws – zinc coated steel | |
| | Size | | 10g × 50 mm long | |
| | Installa | tion | Used to fix ACP (item 1) to the aluminium stiffener (item 7) – four per corner. | |
| 16. | Item na | ame | Hex head tek screw – zinc coated steel | |
| | Size | | 12g × 16 mm long | |
| | Installa | tion | Used to fix aluminium stiffeners (item 7) to themselves | |
| 17. | Item na | ame | Steel rivets | |
| | Size | | Ø4 mm | |
| 18. | Item na | ame | Plasterboard screws | |
| | Size | | 6g × 32 mm long, bugle head, self-drilling screws | |
| 19. | Item na | ame | Fast-fix washers and pin weld | |
| | Size | | 115 mm × 3 mm pins and 25 mm × 25 mm fast fix washers. | |
| Install | ation me | thod | | |
| two C-purlin se installed betwe framing (item 8 unexposed sid | | two C-purlin se installed betwee framing (item & unexposed sid | ame (item 4) was the main support for the test specimen, however, there were ections that acted as false slabs (200 mm tall). Steel stud framing (item 8) was seen the C-purlins. PET insulation (item 11) was inserted within the steel 3) and was capped with 13 mm thick FR plasterboard (item 2) on the le and along the edges. The plasterboard was fixed with plasterboard screws at 300 mm centres on the periphery and 600 mm centres in-field. | |
| system (item The external were connect and aluminium sl sheets. Seal locations. The backpar framing (iten insulation was combinations | | The external section of the wall system largely consisted of an aluminium extrusion framing system (item 5), galvanised steel sheet backpan (item 3) and ACP cassette system (item 1 The external wall was screw fixed using angles. The ACP cassettes were 150 mm deep an were connected to the aluminium extrusion framing (item 5) using aluminium angles (item 6 and aluminium stiffeners (item 7). The angles (item 6) were screw fixed to the extrusions, the aluminium sheeting riveted to the angles, and the ACP cassettes riveted to the aluminium sheets. Sealant (item 13) was used to seal open ACP edges, screw fixings and rivet locations. | | |
| | | framing (item sinsulation was combinations (| item 3) was screw fixed and riveted to the back of the aluminium extrusion 5). Foil faced insulation (item 12) was installed within the external wall. The held to the steel backpan (item 3) with the aid of fast-fix washers and pin (item 19) — at ~600 mm centres - that were welded to the backpan. There was between the backpan and the internal wall studwork. | |

Test standard: General accordance with ISO 13785-1:2002

Job number: RTF230139 Test sponsor: Cladding Safety Victoria (CSV)



3. Test procedure

Table 3 details the test procedure for this reaction to fire test.

Table 3 Test procedure

| Table 3 Test procedure | | | |
|--|--|---|--|
| Item | Detail | | |
| Statement of compliance | The ad-hoc test — which was based off ISO 13785-1:2002 - was performed to determine the reaction to fire performance of an external wall cladding when exposed to heat from a simulated external fire with flames impinging directly upon a façade. The test utilised a burner used in ISO 13785-1:2002 with the specimen mimicking the as-built construction of the façade. | | |
| Sampling / specimen selection | The laboratory was not involved in sampling or selecting the test specimen for the reaction to fire test. The results obtained during the test only apply to the test samples as received and tested by Warringtonfire. | | |
| Test duration | 60 minutes | | |
| Ambient laboratory | Start of the test | 26 °C | |
| temperature | Minimum temperature | 26 °C | |
| | Maximum temperature | 27 °C | |
| Instrumentation and equipment | Eight mineral insulated metal sheathed (MIMS) Type K thermocouples with an overall diameter of 1.5 mm with the measuring junction insulated from the sheath were positioned 60 mm in front of the face of the test specimen. Refer to Figure 1 (TC011 – TC021) for details on positioning. Ten mineral insulated metal sheathed (MIMS) Type K thermocouples with an overall diameter of 1.5 mm with the measuring junction insulated from the sheath were positioned inside the specimen at the centre of the cavity. Refer to Figure 1 (TC001 – TC010) for details on positioning. Three mineral insulated metal sheathed (MIMS) Type K thermocouples with an overall diameter of 1.5 mm with the measuring junction insulated from the sheath were positioned on the face of ACP, 50 mm from the top edge. Refer to Figure 1 (TC019 – TC021) for details on positioning. The incident heat flux on the top of the specimen in line with the front face of test specimen was measured using one Schmidt-Boelter type heat flux gauge with a range of 0-20 kW/m². The fire source was a propane (95% purity) gas burner 1.2 m long × 0.1 m deep × 0.15 m tall. The burner was placed on the floor below the specimen | | |
| Test procedure | At least two minutes of baseline data was collected prior to burner ignition. Temperature and heat flux data was collected at 5 s intervals. The heat output from the burner was held at 100 kW for the first 15 minutes of the test followed by 300 kW for the following 25 minutes of the test. The burner was then turned off and the specimen sprayed with water when excessive flaming was observed. | | |
| Test number | Test four of four. | | |
| Variation between tests The test was based off RTF220104 R1.0, RTF220104 R2.0, RTF220104 F and RTF230111 R1.0. The test specimens for those tests were considered representation of an in-situ wall located at the listed location. The tested spin this test was considered a replica of those tests with the only variation b ACP used, i.e., variation to the percentage of polyethylene in the core, pre of fire-retarding materials in the core and the thickness of panel and panel | | or those tests were considered a e listed location. The tested specimen tests with the only variation being the f polyethylene in the core, presence | |

Test standard: General accordance with ISO 13785-1:2002

Job number: RTF230139

4. Test measurements and results

The results from the tests are summarised below. Photographs of the specimen are included in Appendix B.

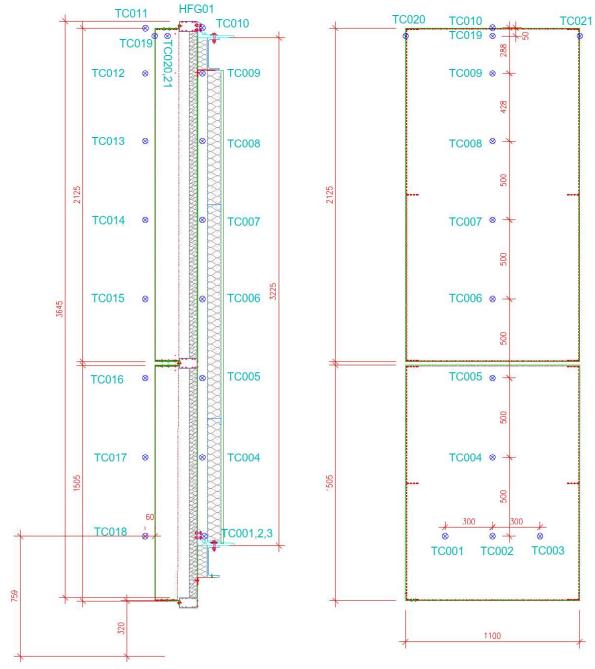


Figure 1 Instrumentation location

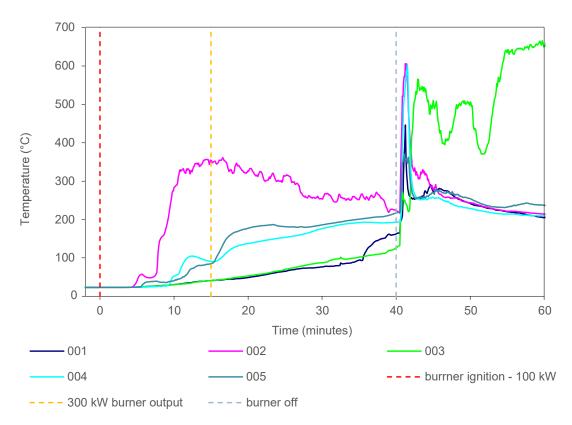


Figure 2 Internal temperature data collected by thermocouples placed within the cavity – between the internal and external segments of the specimen.

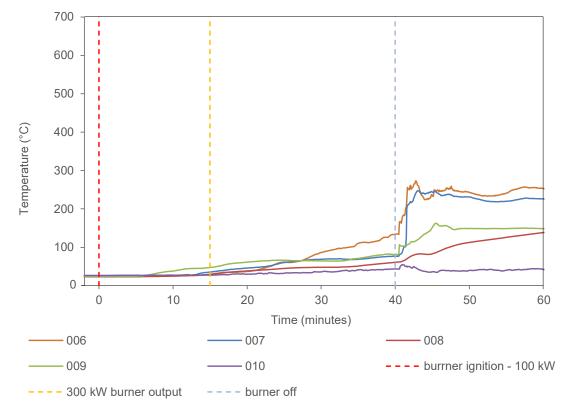


Figure 3 Internal temperature data collected by thermocouples placed within the cavity – between the internal and external segments of the specimen.

Revision: R5.0 Page 9 of 30

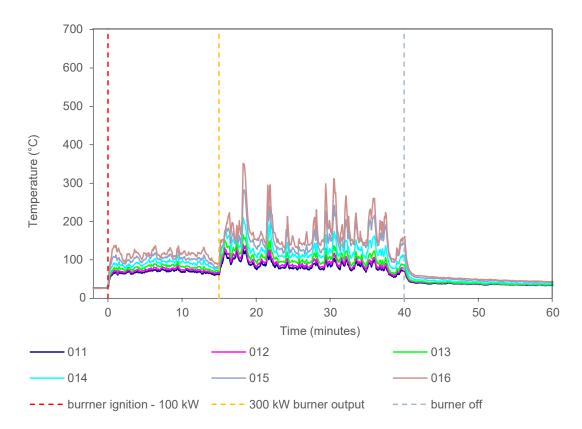


Figure 4 External temperature data collected by thermocouples placed 60 mm from the front face of the specimen.

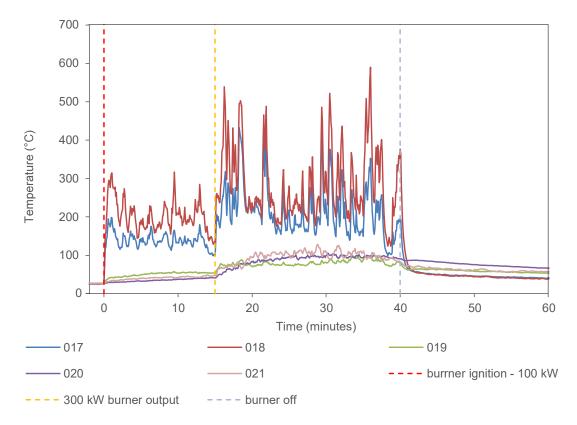


Figure 5 External temperature data collected by thermocouples placed 60 mm from the front face of the specimen.

Test standard: General accordance with ISO 13785-1:2002 Job number: RTF230139 Test sponsor: Cladding Safety Victoria (CSV)

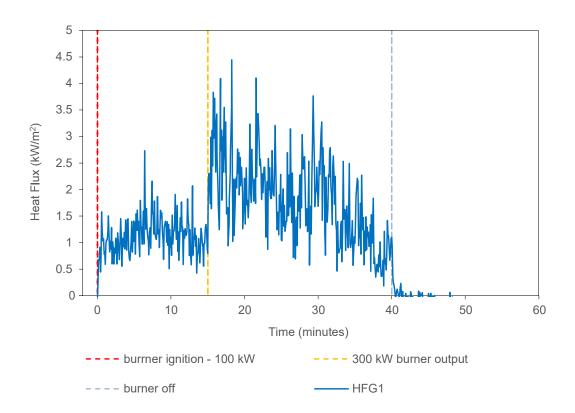


Figure 6 Heat flux data collected by heat flux gauge.

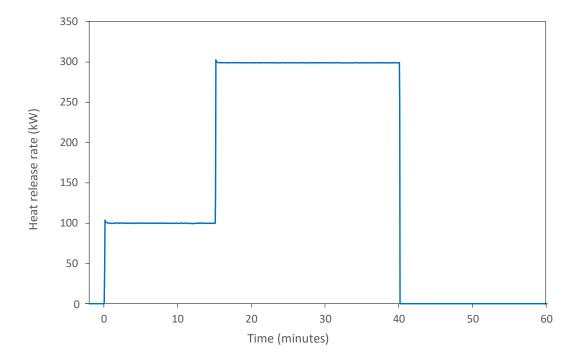


Figure 7 Heat release rate of burner.



Figure 8 Designation for test specimen observations.



Table 4 shows the observations of any significant behaviour of the specimen during the test.

Video recordings were also taken of the test. A copy of the video recording is available upon request from the test sponsor or by contacting Cladding Safety Victoria. The video of the test should be viewed in conjunction the contents of this report.

Table 4 Test observations

| Table 4 | | Test observations | |
|---------|-----|-------------------|---|
| Ti | me | Section | Observation |
| Min | Sec | | |
| -2 | 00 | All | Data collection started. |
| 0 | 00 | All | The reaction to fire test was started with the burner ignited with a heat output set at 100 kW. |
| 1 | 00 | 1A | The skin at the bottom edge was becoming discoloured. |
| 1 | 20 | 1A | Smoke was emitted from the sides of the specimen. |
| 3 | 15 | 1A | Flaming debris was dripping from the bottom right corner. |
| 4 | 00 | 1A | Flaming debris was dripping from the bottom right corner of the specimen and continued flaming for longer than 20 seconds. |
| 4 | 20 | 1A/1B | Discolouration of the panel skin reached 1B. |
| 4 | 40 | 1A | Flaming debris was dripping from the bottom left corner. |
| 6 | 03 | 1A/1B | Flames were present climbing vertically along both edges of the specimen. |
| 8 | 52 | 1B/1C | Flames were present climbing vertically along the right edge of the specimen and intermittently reached the panel join. |
| 11 | 57 | 1C/2A | Intermittent flaming was present in the panel join. |
| 15 | 00 | All | The burner output was increased to 300 kW. |
| 15 | 50 | 1A | The panel skin was peeling off. |
| 16 | 19 | 1C/2A | Flames at both sides of the specimen sustained a height above the panel join. |
| 16 | 30 | 1A | The panel was deforming. |
| 16 | 55 | 1B | The panel skin was peeling off at the right side. |
| 17 | 15 | 1C | Discolouration of the panel skin. |
| 18 | 20 | 1B | The panel was deforming. |
| 18 | 37 | 1B | The panel skin was peeling off at the left side. |
| 18 | 34 | 1C/2A | Independent flaming of the panel join was sustained. |
| 32 | 25 | 2A | Gas was released from the bottom of the upper panel, causing deformation predominantly at the bottom left corner of the upper panel. |
| 40 | 00 | All | The burner was switched off. |
| 40 | 32 | 2C | Gas was released from the top of the upper panel, initiating flaming of the top of the specimen on the left side. |
| 42 | 26 | 2C | Flaming at the head had ceased. |
| 47 | 09 | 1A/1B/1C/ 2A | Flaming at the right side of the lower panel ceased. Flaming at the right side of the panel join and inside the lower panel continued. |
| 48 | 53 | 1C/2A | Both sides of the panel join were flaming. |
| 52 | 46 | 1A/1B | The flaming inside the lower panel had formed an opening on the right side of the lower panel, and flaming was intermittently exiting the hole. |
| 57 | 40 | 1A | A black plasticky substance was dripping from the bottom right side of the specimen, at the back. |
| 60 | 00 | All | The reaction to fire test ended. |
| | | | |

Revision: R5.0 Page 13 of 30



5. Application of test results

5.1 Test limitations

The results of these fire tests may be used to directly assess fire hazard, but it should be recognised that a single test method will not provide a full assessment of fire hazard under all fire conditions.

These results only relate to the behaviour of the specimen of the element of construction under the particular conditions of the test. They are not intended to be the sole criteria for assessing the potential fire performance of the element in use, and they do not necessarily reflect the actual behaviour in fires.

5.2 Variations from the tested specimen

This report details methods of construction, the test conditions and the results obtained when the specific element of construction described here was tested following the procedure outlined in Table 3. Any significant variation with respect to size, construction details, loads, stresses, edge or end conditions is not addressed by this report.

It is recommended that any proposed variation to the tested configuration should be referred to the test sponsor. They should then obtain appropriate documentary evidence of compliance from Warringtonfire or another accredited testing authority.

5.3 Uncertainty of measurements

Because of the nature of reaction to fire testing and the consequent difficulty in quantifying the uncertainty of measurements obtained from a reaction to fire test, it is not possible to provide a stated degree of accuracy of result.

Test standard: General accordance with ISO 13785-1:2002 Job number: RTF230139

Job number: RTF230139
Test sponsor: Cladding Safety Victoria (CSV)

Appendix A Drawings of test assembly

The drawings of the test assembly in Figure 9 to Figure 12 were provided representatives of Warringtonfire. Dimensions, unless specified, are in mm.

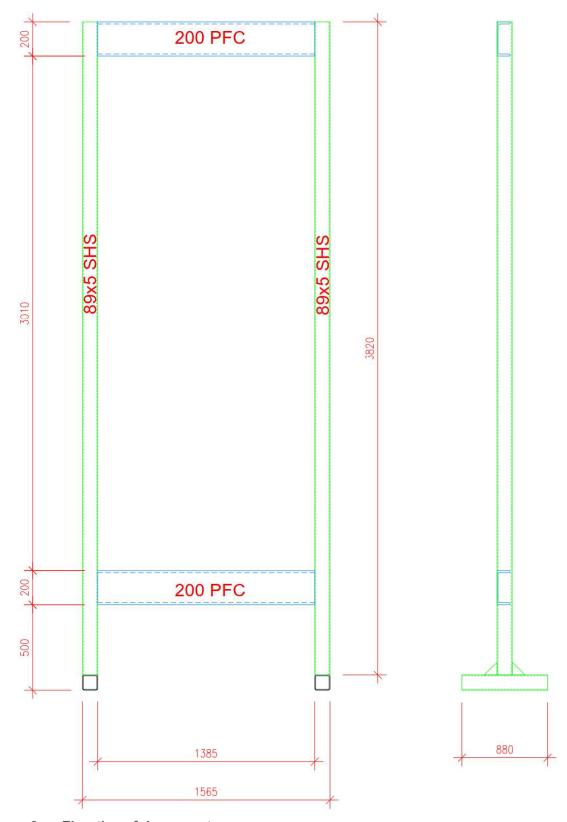


Figure 9 Elevation of rig support.

Test standard: General accordance with ISO 13785-1:2002 Job number: RTF230139

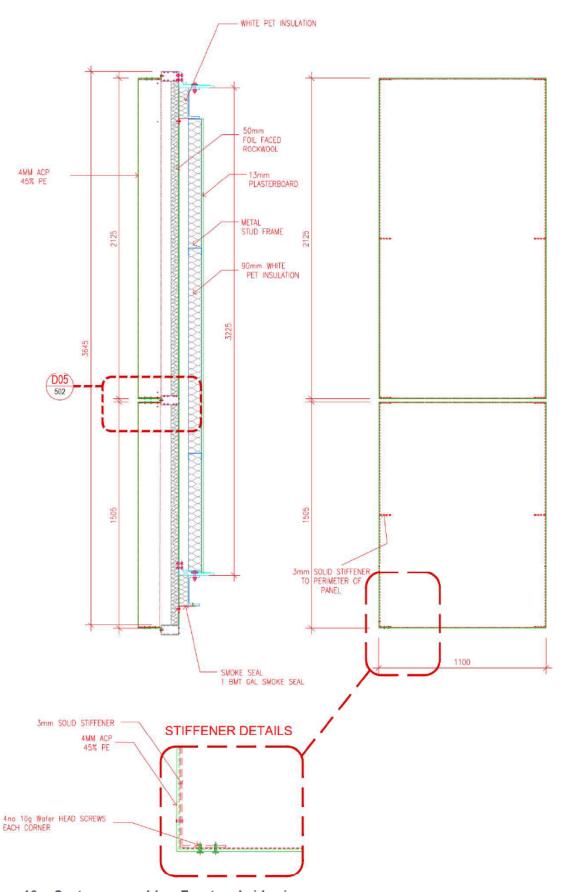


Figure 10 System assembly - Front and side view

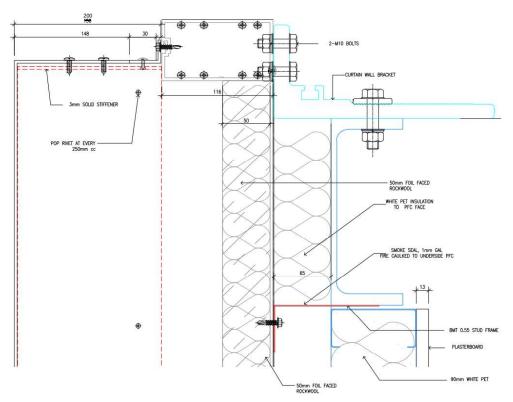


Figure 11 System assembly – top edge detail

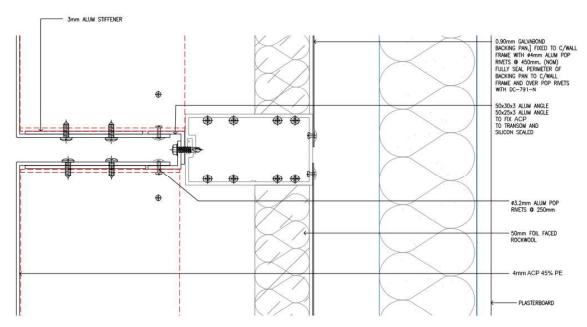


Figure 12 System assembly – middle join detail (D05)

Revision: R5.0 Page 17 of 30

Appendix B Photographs



Figure 13 The specimen before the reaction to fire test

Test standard: General accordance with ISO 13785-1:2002

Job number: RTF230139



Figure 14 The specimen before the reaction to fire test – unexposed side

Revision: R5.0 Test sponsor: Cladding Safety Victoria (CSV) Page 19 of 30



Figure 15 The specimen 12 minutes 56 seconds into the test (burner output at 100 kW)



Figure 16 The specimen 14 minutes 59 seconds into the test (burner output at 100 kW)

Test standard: General accordance with ISO 13785-1:2002 Job number: RTF230139



Figure 17 The specimen 15 minutes 30 seconds into the test (30 seconds after burner output was changed to 300 kW)



Figure 18 The specimen 20 minutes into the test (5 minutes after burner output was changed to 300 kW)

Test standard: General accordance with ISO 13785-1:2002

Job number: RTF230139



Figure 19 The specimen 33 minutes into the test (8 minutes after burner output was changed to 300 kW)



Figure 20 The specimen 39 minutes 42 seconds into the test (24 minutes 42 seconds after burner output was changed to 300 kW)

Test standard: General accordance with ISO 13785-1:2002

Job number: RTF230139



Figure 21 The specimen 41 minutes 50 seconds into the test (1 minute 50 seconds after burner was switched off)



Figure 22 The specimen 50 minutes 3 seconds into the test (10 minutes 3 seconds after burner was switched off)

Test standard: General accordance with ISO 13785-1:2002

Job number: RTF230139



Figure 23 The specimen at the end of the test



Figure 24 The specimen after the test – unexposed side.

Test standard: General accordance with ISO 13785-1:2002

Job number: RTF230139



Appendix C Chemical analysis results



UNSW RESEARCH INFRASTRUCTURE

Chemical Consulting Laboratory

Mark Wainwright Analytical Centre UNSW Sydney NSW 2052 Australia

T: +61(2) 9348 1400 | E: ccl@unsw.edu.au
W: www.analytical.unsw.edu.au/contact-us/commercial-consulting
ABN 57 195 873 179 | CRICOS Provider Code 00098G

Test Report

Prepared by:

ANALYSIS OF CLADDING SAMPLES

REF: UB8388

For

Company: Warrington Fire

Contact:

Date: 17 October 2023

Project No: 23197

Prepared by:
Approved by:



COMMERCIAL-IN-CONFIDENCE

Any use of the Test Report, use of any part of it, use of the names University of New South Wales or UNSW, use of the name of any Unit of UNSW, or use of the name of the consultant in direct or indirect advertising or publicity is strictly forbidden.

Project No.: 23197

Chemical Consulting Laboratory - UNSW

Page 1 of 6

This report shall not be reproduced, except in full, without written approval of the CCL

Test standard: General accordance with ISO 13785-1:2002 Job number: RTF230139

Test sponsor: Cladding Safety Victoria (CSV)

Revision: R5.0 Page 25 of 30





Analysis of Cladding Samples REF: UB8388

1. SAMPLES

One plastic sachet containing two ACP cores was received for analysis. The samples were identified as follows:

| CCL sample coding | Client sample coding |
|-------------------|----------------------|
| 23197-1 | Oak |
| 23197-2 | Silver |

CCL has been asked to identify the polymer and the filler (s) in the samples by FT/IR, quantitate and identify the mineral filler in the samples and classify them in accordance with the ICA cladding scheme.

2. METHODOLOGY AND RESULTS

The aluminium metal was removed from the ACPs cladding polymer, and the flat surface of the polymer samples was abraded to remove any surface adhesive. The surface of each sample was analysed directly by FTIR. The FT-IR spectrum is presented in Figures 1-2.

The core of each sample was then ashed to determine its percentage mineral content (Table 1). If sufficient (>0.5 g) ash had been produced it was analysed for elemental composition by X ray fluorescence spectroscopy. Results are presented in Table 2.

Table 1 Ash content of samples.

| Sample coding | Ash content (w/w%) |
|---------------|--------------------|
| 23197-1 | 39.5 |
| 23197-2 | 21.6 |

Project No.: 23197 Chemical Consulting Laboratory - UNSW Page 2 of 6

This report shall not be reproduced, except in full, without written approval of the CCL

Test standard: General accordance with ISO 13785-1:2002

Job number: RTF230139



Table 2 Elemental composition of 23197-1

| Element Oxide wt.% | 23197-1 |
|--------------------------------|---------|
| Na ₂ O | 0.45 |
| MgO | 79.26 |
| Al ₂ O ₃ | 0.39 |
| SiO ₂ | 4.87 |
| P ₂ O ₅ | 0.12 |
| SO ₃ | 0.26 |
| K ₂ O | 0.04 |
| Ca0 | 8.66 |
| TiO ₂ | 2.24 |
| V ₂ O ₅ | 0.01 |
| Cr ₂ O ₃ | <0.01 |
| Mn ₃ O ₄ | 0.04 |
| Fe ₂ O ₃ | 0.55 |
| NiO | <0.01 |
| CuO | <0.01 |
| Zn0 | 0.01 |
| Sr0 | <0.01 |
| ZrO ₂ | <0.01 |
| Ba0 | 0.09 |
| HfO ₂ | <0.01 |
| PbO | <0.01 |
| L.O.I. | ND |

NOTE: (i) L.O.I.= loss on ignition at 1,050 $^{\circ}$ C. (ii) ND = not determined



Project No.: 23197 Chemical Consulting Laboratory - UNSW Page 3 of 6

This report shall not be reproduced, except in full, without written approval of the CCL

Test standard: General accordance with ISO 13785-1:2002 Job number: RTF230139 Test sponsor: Cladding Safety Victoria (CSV)



3. CONCLUSIONS

The cladding sample #1 consisted of consisted of 45.3% magnesium hydroxide, 6.1% calcium carbonate, 4.8% other inert material and approximately 43.9% polyethylene/EVA copolymer.

The cladding sample #1, is classified as ICA category A.

The cladding sample#2 consisted of consisted of 21.6% inert material and approximately 78.4% polyethylene/EVA copolymer.

The cladding sample #2, is classified as ICA category A.

The ICA Classification assigned is correct as per the September 2020 revision of the ICA Guidelines.

The calculation for magnesium hydroxide content assumes that all magnesium found is present as the hydroxide. The calculation for calcium carbonate content assumes that all calcium found is present as calcium carbonate.

The reader is reminded that we can only analyse and classify the content of samples actually presented to us. We can offer no guarantee that this composition or classification is valid for cladding as a whole, because some types of cladding can be inhomogeneous, and a sample may not be representative of the cladding as a whole. Anyone using our results should consider these sampling issues and uncertainties before they generalise the results we present to anybody of cladding as a whole.

Technical Officer Chemical Consulting Laboratory Mark Wainwright Analytical Centre, UNSW 17 October 2023



Project No.: 23197 Chemical Consulting Laboratory - UNSW Page 4 of 6

This report shall not be reproduced, except in full, without written approval of the CCL

Test standard: General accordance with ISO 13785-1:2002 Job number: RTF230139

Revision: R5.0 Test sponsor: Cladding Safety Victoria (CSV) Page 28 of 30

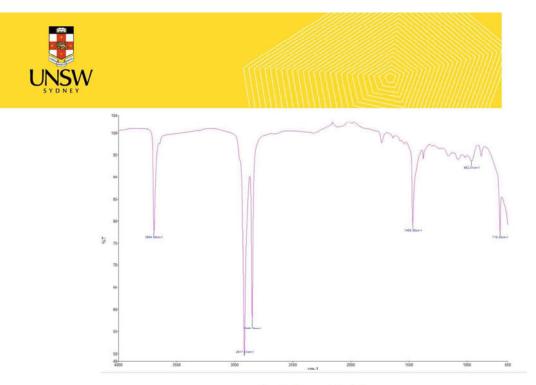



Figure 1. FT-IR spectrum of Sample #1

Project No.: 23197

Chemical Consulting Laboratory - UNSW

Page 5 of 6

This report shall not be reproduced, except in full, without written approval of the CCL

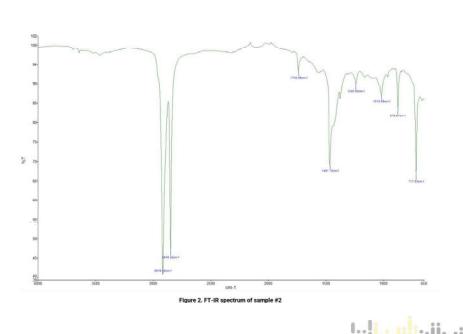

Chemical Consulting Laboratory - UNSW Page 6 of 6

This report shall not be reproduced, except in full, without written approval of the CCL

Test standard: General accordance with ISO 13785-1:2002

Job number: RTF230139

Project No.: 23197

Test sponsor: Cladding Safety Victoria (CSV)

Revision: R5.0 Page 29 of 30



Warringtonfire Australia Pty Ltd ABN 81 050 241 524

Perth

Suite 4.01, 256 Adelaide Terrace Perth WA 6000 Australia T: +61 8 9382 3844

Sydney

Suite 802, Level 8, 383 Kent Street Sydney NSW 2000 Australia T: +61 2 9211 4333

General conditions of use

Canberra

Unit 10, 71 Leichhardt Street Kingston ACT 2604 Australia T: +61 2 6260 8488

Brisbane

Suite B, Level 6, 133 Mary Street Brisbane Qld 4000 Australia T: +61 7 3238 1700

Melbourne

Level 4, 152 Elizabeth Street Melbourne Vic 3000 Australia T: +61 3 9767 1000

Melbourne - NATA accredited laboratory

409-411 Hammond Road Dandenong South Vic 3175 Australia T: +61 3 9767 1000

The data, methodologies, calculations and results documented in this report specifically relate to the tested specimen/s and must not be used for any other purpose. This report may only be reproduced in full. Extracts or abridgements must not be published without permission from Warringtonfire.